

Off-Grid Inverter

FSD-3~4.2K1P-BL

「3/3.6/4/4.2kW」



Features

High-Power Module Compatibility  
Higher PV input current up to 18A

Enhanced Overload Capacity  
2 times the rated power for 5 seconds

Parallel Connection  
Parallel connection with up to 9 units

Smart Load Management  
Dual AC outputs to power loads on demand priority


Seamless Switchover  
UPS-level switching time: 4ms

Efficient Battery Charge/Discharge  
Max. 120A charge current  
Max. 137A discharge current

Remote Monitoring  
Built-in WiFi module for HaiPower monitoring

Stylish Design  
Larger screen with touch keys

Off-grid Solution

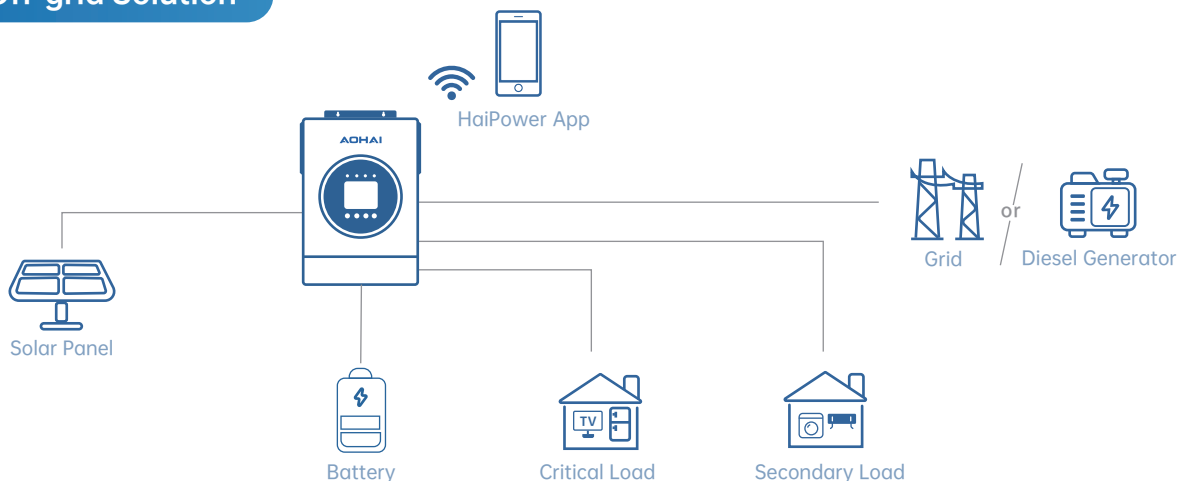

# Specifications

Model	FSD-3K1P-BL	FSD-3.6K1P-BL	FSD-4K1P-BL	FSD-4.2K1P-BL
<b>Solar Input Data</b>				
Max. PV Input Power	3300W	3960W	4400W	5200W
Max. Input Voltage	500V			
Start-up Voltage	90V			
MPPT Voltage Range	60V~450V			
Max. Input Current per MPPT	18A			
Max. Short Circuit Current per MPPT	23A			
Number of MPPT	1			
<b>Battery Data</b>				
Battery Type	Li-Ion / Lead-acid			
Nominal Battery Voltage	24V			
Battery Voltage Range	20~30V			
Max. Discharge Current	137A			
Max. Charge / Discharge Power	3000W			3300W
Li-Ion Battery Activation	Yes			
Li-Ion Battery Communication	CAN / RS485			
Max. Solar Charge Current	120A			
Max. AC Charge Current	100A			
Max. Charge Current (PV+AC)	120A			
<b>AC Input Data (Grid)</b>				
Nominal Input Voltage	230Vac, L / N / PE			
Input Voltage Range	90~280V			
Max. Input Current	25A			
Nominal Input Power	5700W			
AC Frequency Range	50 / 60Hz (Auto sensing)			
<b>Inverter Output Data</b>				
Nominal Output Power	3000W	3600W with PV & battery 3000W with battery only	4000W with PV & battery 3300W with battery only	4200W with PV & battery 3300W with battery only
Peak Apparent AC Power	6000VA	7200VA	8000VA	8400VA
Nominal AC Voltage	230V			
Nominal Grid Frequency	50 / 60Hz			
Voltage Waveform	Pure Sine Wave			
Transfer Time (Typ)	4ms			
Nominal Output Current	13.1A	15.7A	17.4A	18.3A
Overload Protection	30s@102%-110% load; 10s@110%-130% load; 5s@130%-200% load			
THDv (@linear load)	<3%			
<b>Efficiency</b>				
Peak Efficiency	94%			
MPPT Efficiency	≥99.9%			
<b>Protect</b>				
DC Surge Protection	Yes			
AC Surge Protection	Yes			
AC Short Circuit Protection	Yes			
<b>System Parameters</b>				
Dimension (W*H*D)	333mm*505mm*120mm			
Weight	10.6kg			
Relative Humidity	5%~95% (Non-condensing)			
Operating Temperature Range	-10°C~60°C			
Noise Emission	≤50dB			
Altitude	2000m			
Cooling Method	Fan Cooling			
Ingress Protection	IP21			
<b>Characteristic</b>				
Number of AC Output	2			
Display	LCD & APP			
Communication Interface	RS485 / USB / CAN / Wi-Fi			
Parallel Capability	9			